



"WE MAKE THE KITCHEN BETTER!"
 Toll Free: 855-855-4399 Email: info@atosausa.com
 www.atosausa.com | www.atosausa.com
 California, Colorado, Florida, Georgia, Illinois,
 New Jersey, Ohio, Texas, Washington

Bottom Mount Reach-In Refrigerators

Standard Features

- Bottom mount compressor units with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic temperature controller
- Maintains temperatures between 33°F - 40°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three(3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

Optional Accessories

- Extra shelves - includes 4 shelf clips per shelf
 MBF8505GR shelf part #: W0402393
 MBF8507GR shelf part #: W0402387
 MBF8508GR shelf part #: W0402387 left/right shelf,
 part #: W0402388 middle shelf

For the best results of food preservation we recommend setting your refrigerator between 33°F to 38°F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

2 YEAR PARTS AND LABOR WARRANTY (US ONLY)
 5 YEAR COMPRESSOR PART WARRANTY (US ONLY)

13

MODELS:

MBF858GR / MBF856GR / MBF857GR / MBF858GR



MBF8505GR MBF8506GR



MBF8507GR



MBF8508GR



*For confirmation and updates on the latest energy star models, please visit energystar.gov




"WE MAKE THE KITCHEN BETTER!"
 Toll Free: 855-855-4399 Email: info@atosausa.com
 www.atosausa.com | www.atosausa.com
 California, Colorado, Florida, Georgia, Illinois,
 New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Doors	Capacity (cu.ft.)	Shelves	Casters (each)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MBF8505GR	1	19.1	3	4	2.1	115/60/1	1.7	R290	27-31 1/4" x 83 1/4"	249	292
MBF8506GR	2	28.5	6	4	3.2	115/60/1	1.5	R290	30 1/2" x 31 1/4" x 83 1/4"	317	368
MBF8507GR	2	43.8	8	4	3.2	115/60/1	1.6	R290	34 1/2" x 31 1/4" x 83 1/4"	397	452
MBF8508GR	3	68	9	4	4.2	115/60/1	1.4	R290	33 1/4" x 31 1/4" x 83 1/4"	558	615

PLAN VIEW

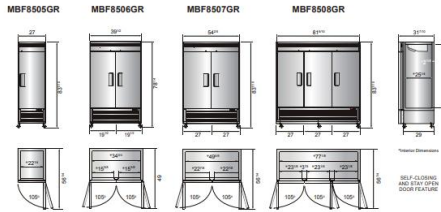

Casters Epoxy shelves Door lock Down-duct Temperature control



Amana International
 www.atosausa.com

Amana USA
 www.atosausa.com

Amana is continuously improving products. Specifications are subject to change without notice. 14



FABRICATED ECONOMY SINKS

Three & Four Compartments



Roll-Over Rim Edge For Additional Strength

Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____

Fabricated Sinks are Welded Together at the Seams
 K-700 Removable Side Splashes Fits Left OR Right Side

FEATURES:
 Backed with 1/2" edge for ease of installation.
 Sink bowls are 3/4" covered corner and meet NSF requirements.
 Roll-Over Rim Edge for additional strength.
 Sink bowls are 1/4" deep for greater capacity.

CONSTRUCTION:
 All 16 welded.
 Welded areas blended to match adjacent surfaces and is a built-in finish.
 Gaskets welded to a die-formed reinforced plate.

MATERIAL:
 1 1/2" diameter stainless steel legs with 1" adjustable stainless steel leveling feet.
 Entire unit is 16 gauge 304 stainless steel.
 Quartz - stainless steel.

MODEL #	Length	Width	Bowl Size	Drain Length	# of Drains	Drain Size	WT
FC-915S	60"	20 1/2"	N/A	N/A	None	None	110 lbs.
FC-915S-18Rt	62 1/2"	20 1/2"	15"x15"	15"	1	Specify 1/2" R & L	120 lbs.
FC-915S-18L	70"	20 1/2"	15"x15"	15"	2	R & L	120 lbs.
FC-916S	63 1/2"	26"	N/A	0	None	None	120 lbs.
FC-916S-18Rt	68 1/2"	26"	18"	1	Specify 1/2" R & L	150 lbs.	
FC-916S-18L	84"	26"	18"x20"	18"	2	R & L	150 lbs.
FC-916S-24Rt	96"	26"	24"	2	R & L	200 lbs.	
FC-916S-24L	100"	26"	26"	2	R & L	240 lbs.	
FC-918S	67"	24"	N/A	0	None	None	120 lbs.
FC-918S-18Rt	74 1/2"	24"	18"	1	Specify 1/2" R & L	140 lbs.	
FC-918S-18L	90"	24"	18"x18"	18"	2	R & L	140 lbs.
FC-918S-24Rt	102"	24"	24"	2	R & L	180 lbs.	
FC-918S-24L	106"	24"	24"	2	R & L	180 lbs.	
FC-918S	67"	30"	N/A	0	None	None	120 lbs.
FC-918S-18Rt	74 1/2"	30"	18"	1	Specify 1/2" R & L	140 lbs.	
FC-918S-18L	90"	30"	18"x24"	18"	2	R & L	200 lbs.
FC-918S-24Rt	102"	30"	24"	2	R & L	300 lbs.	
FC-918S-24L	106"	30"	24"x20"	24"	2	R & L	310 lbs.
FC-920S-24Rt	106"	36"	20"x20"	20"	2	R & L	310 lbs.
FC-920S-24L	110"	36"	20"x20"	20"	2	R & L	310 lbs.
FC-924S	77"	30"	N/A	0	None	None	170 lbs.
FC-924S-18Rt	80.5"	30"	18"	1	Specify 1/2" R & L	190 lbs.	
FC-924S-18L	108"	30"	24"x24"	18"	2	R & L	330 lbs.
FC-924S-24Rt	98 1/2"	30"	24"	1	Specify 1/2" R & L	330 lbs.	
FC-924S-24L	102"	30"	24"	2	R & L	350 lbs.	
FC-918S-18Rt	108"	24"	18"x18"	18"	2	R & L	270 lbs.
FC-918S-18L	108"	30"	18"x24"	18"	2	R & L	320 lbs.
FC-924S-24Rt	114"	30"	24"x24"	24"	2	R & L	350 lbs.

*Requires Two Sets of Faucets




Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.
 For Orders & Customer Service: Email: customer@advancetabco.com or Fax: 631-242-6900
 For Smart Fabrication® Quotes: Email: smart@advancetabco.com or Fax: 631-586-2933

REF-6

REF-6 200 Heartland Boulevard, Edgewood, NY 11713-8300

DIMENSIONS and SPECIFICATIONS

TOL Overall: ± .005"
 Interior: ± .002"
 ALL DIMENSIONS ARE TYPICAL




3 COMP - 2 DRBD

3 COMP - 1 DRBD

3 COMP

4 COMP - 2 DRBD

ACCESSORIES	Model #	Qty
DRAINS		
FAUCETS		



PLUMBING ROUGH-IN

SECTION

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.
 © ADVANCE TABCO, OCTOBER 2016